
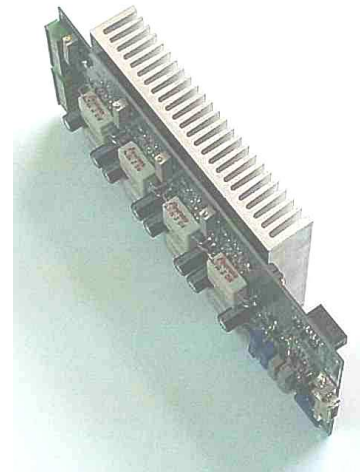


## Linear Driver.

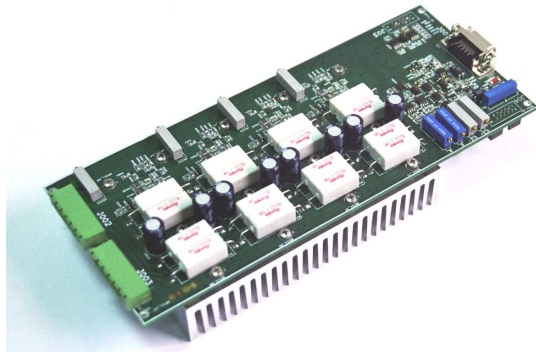

### Specifications:

Output current **0 – 6 A;**  
 Output voltage **0 – 40 V;**  
 Number of Phases for motor connection: **2 and/or 3;**  
 Dynamic range (at least) **85 db;**  
 Signal to noise (at least) **90 db;**  
 Resolution of input signal (from control system):  
     **14 bit for analog (differential) +/- 2.5 V;**  
     **16 bit for digital synchronous optoisolated channel with**  
     baud rate up to **10 Mbod.**

Power supply dual +/- 24 VDC;  
 Digital In/Out optoisolated control signals (enable, disable, status).

#### Protection:

- over current;
- over voltage;
- over temperature;
- power fault.

Dimensions (no power supply);  
 100 x 50 x 235 mm (H x W x L )

